



MJ-GERÜST
Scaffolding Systems

Stark gerüstet.

Modular Scaffolding COMBI metric

Prices

English



valid from 15.04.2013

Contents

Assembling the system	2 - 5
Vertical standards	6
Horizontal ledgers	7 - 9
Diagonal bracing	10 - 11
Decks	12 - 13
Scaffold Access	14
Toeboards	15
Brackets / Base jacks / castor	16
Stairs	17
Ladders / Lattice beams / Accessories	18
Accessories / Roofcomponents / Tube connectors / Transoms	19
Aluminium keder rail system	20
Scaffold tubes / Supports	21
Couplers	22 - 25
Anchoring / Storage	26
Protective equipment against falling	27
Notes	28
Fax order form	29

Prices marked with an asterisk are net prices.
Discounts / deductions cannot be granted for these prices.

All prices are excl. of VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Technical data is subject to change without notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. In brief: place of business and jurisdiction is Pletteberg. Extended reservation of property rights until full payment of all our outstanding accounts receivables. Our prices are ex works.



BUNDESVERBAND
GERÜSTBAU

MITGLIEDSBETRIEB



Your satisfaction is our success

With the modular scaffold MJ COMBI metric, we have developed a system that caters to all requirements of constructive scaffolding.

MJ COMBI metric is based on the proven and flexible functionality of the modular disk. For the construction of the knot design, we used the so-called finite element method (FEM) in order to achieve stress-optimised lifting capacity and weight reduction at the same time. In addition, this resulted in an optimised load application via the ledgers into the standards. As a result, the MJ COMBI metric convinces with its exceptional static values. With up to eight connections per knot – freely selectable in heights of 0.50 m intervals – the system offers the highest possible variability in constructing a modular scaffold. The small notches of the perforated disk are used to connect the ledgers and enforce a 90 degree angle, which is required for many forms of application. In connection with the larger notches arranged in between, the system also offers variable assembly options for angles outside the 90-degree. The decisive benefit of the modular scaffold is – besides freely definable angles of knots – in the individual selection of bay lengths, widths and level heights. This enables flexible adjustments to virtually any type of building or construction.

MJ COMBI metric can be put to use in all demanding areas of scaffolding: industrial construction, shipbuilding and aircraft construction, offshore areas in petrochemistry, building construction, stage construction and trade fair construction. As a non-mobile scaffold, suspended or mobile scaffold, as surface, support and spatial scaffold, for the restoration of bridges and historical buildings, or for round scaffolding in the interior of tanks. MJ COMBI metrics optimally adapts to the object. Also emergency stairway towers with high loads can be easily made of standard components.

Good reasons, for choosing our system:

Convincing statistical values
through sophisticated construction

Efficiency
through quick assembly and dismantling

High returns
through long service life

Flexibility
various scaffold widths and bay lengths

Strong
up to 6 kN/m²

MJ-Gerüst – top-quality scaffolding „Made in Germany“


MJ-Gerüst, headquartered in the town of Plettenberg in the German province of Sauerland, is part of a strong group of companies, that looks back on 50 years of company history. MJ's core competencies focus on the production and worldwide sale of high-quality scaffolding systems made of steel or aluminium that offer virtually infinite possibilities in terms of modern system scaffolding.

Reasons for you to become our partner:


- We manufacture our products in Germany.
- We are DIN EN 9001 and 14001 certified.
- We secure the very highest product quality with dynamic quality management.
- Thanks to our extensive storage capacities and short decision-making paths we ensure Short-term material availability.
- We support you with your projects as early as the planning phase.
- We ensure global on-time shipment.




MJ-Gerüst GmbH based in Plettenberg, Germany

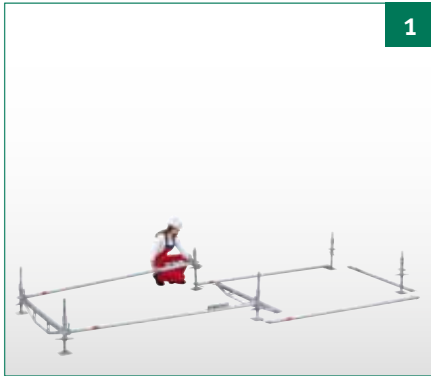

1
Set up the spindles and attach the initial pieces. Then assemble the lower crossbar and use a water level to make sure the fields are perpendicular.

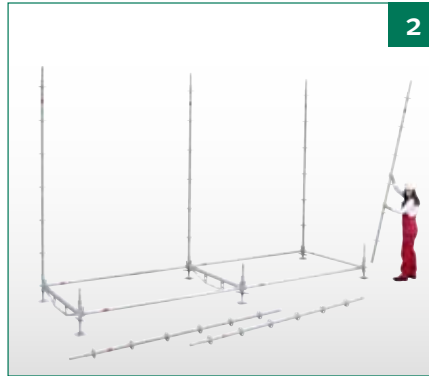


2
Insert the vertical bars.

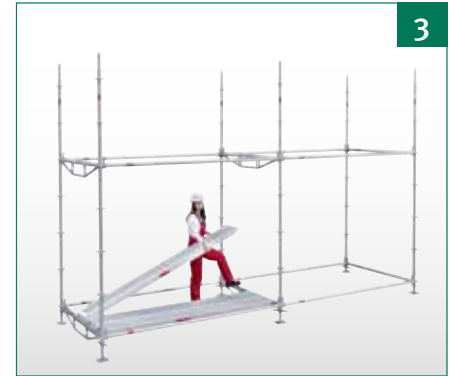


3
Attach the other crossbars. Where necessary, lay down planks as a bottom support for the ladder section.

The significant advantages of the MJ COMBI metric system – an overview:

- **First-rate load values** due to its well-developed, optimized construction
- **economical** due to its fast assembly and disassembly
- **high return on investment** due to its long lifespan
- **flexible** due to its large selection of scaffolding widths and field lengths
- **resistant up to 6 kN/m²**

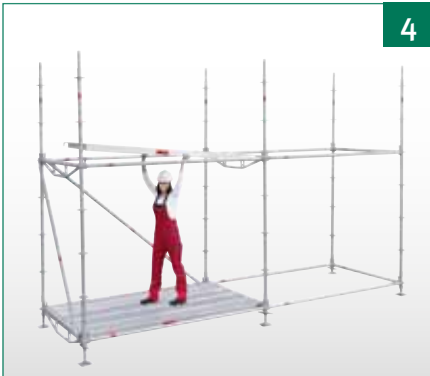

Assemble step-through frames, planks and diagonals.

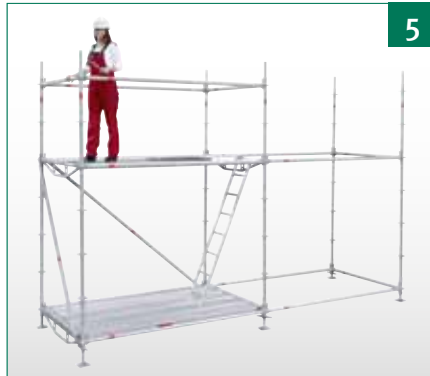

On the next level, start by attaching crossbars for fall protection.



Assemble the other components and proceed in the same way with the following scaffolding levels.



Flexible.
Simple.
Safe.

The simple assembly of our MJ COMBI metric system saves time and money

Here's how it works:

The head of the crossbar is simply pushed into the rotating disk on the vertical bar. Then the wedge is slid through one of the holes and fixed in place with a hammer. It could hardly be any simpler or faster.



An endless variety – MJ COMBI metric's range of components

There are many reasons to choose the MJ COMBI metric modular scaffolding system. Not least of these is its extensive range of series-manufactured components, such as crossbars and diagonals in more than 50 different lengths, as well as consoles with various widths -

making the MJ COMBI metric a "all-rounder" in its field. The use of U-shaped base crossbars allows various façade scaffolding systems to be integrated without any difficulty.









* Please always consult the assembly and usage instructions!



MJ COMBI metric

Vertical standards

	Length m	Weight approx. kg	Article No.	Price Euro
	VERTICAL STANDARD WITH EXTRUDED TUBE CONNECTOR Steel, hot-dip galvanised. Drilled in the upper and lower part for tension proof connection. Perforated disks with a distance of 0.50 m for up to 8 connections. Posts with extruded tube connectors can also be used for suspended scaffolds or when moving by crane. PU: 80 pieces (length 0,50 m) 40 pieces (length 1,00 - 4,00 m)			
	0,50	3,20	000696	16,40
	1,00	5,20	000706	21,60
	1,50	7,70	000719	30,90
	2,00	9,80	000727	35,90
	2,50	12,10	000764	47,90
	3,00	14,40	000738	52,40
	VERTICAL STANDARD WITHOUT TUBE CONNECTOR like before, however drilled at top and bottom twice to screw in tube connectors. The optimal solution for suspended scaffolding. PU: 40 pieces			
	0,50	2,80	000697	17,40
	1,00	4,30	000707	21,90
	1,50	6,80	000720	30,90
	2,00	8,90	000728	35,40
	2,50	11,20	000765	47,90
	3,00	13,50	000739	51,90
	STARTING COLLAR with perforated disk, together with base plates forms the scaffold base. The vertical standard is placed in the starting collar for further assembly.			
	0,23	1,40	004833	10,10
	VERTICAL BASE STANDARD Steel, hot-dip galvanised. With additional lower perforated disk. As an alternative to the vertical standard plus starting collar. PU: 40 pieces			
	0,66	4,20	005751	23,90
	1,16	6,50	005752	33,40
	2,16	11,00	004712	48,40
	3,16	15,40	005753	68,90
	TUBE CONNECTOR FOR VERTICAL STANDARD to screw in vertical standard without tube connector. Complete with 2 locking nuts and screws.			
	0,52	2,00	005114	9,90
	HEXAGON BOLT M12 X 70			
	–	0,06	002049	0,70
SELF-LOCKING NUT				–
SUSPENDED SCAFFOLD CONNECTOR Steel, hot-dip galvanised. For tension-free connection of post ends for use as suspended scaffold or when moving by crane. Install in pairs.				0,50
				3,00
				005115
				23,90

**LEDGER**


Steel, hot-dip galvanised.
To be installed as a support
for decks, as guardrail
and as bracing element.
PU: 50 pieces

	Length m	Weight approx. kg	Article No.	Price Euro
	0,25	1,40	005620	19,40
Centre to centre distance UNI 40	0,41	2,00	005653	20,40
	0,50	2,20	004834	22,00
Centre to centre distance UNI 70	0,74	3,55	004510	16,90
	0,75	3,60	000748	16,90
	1,00	4,00	000809	21,60
Centre to centre distance UNI 110	1,10	4,20	000763	22,60
	1,25	4,90	005654	24,20
Centre to centre distance 4-board	1,39	5,40	005655	25,20
	1,50	6,10	000749	25,20
	2,00	7,60	000750	28,40
	2,50	9,40	000751	31,90
	3,00	10,90	000752	36,10
	4,00	13,30	004512	54,90

**REINFORCED LEDGER**


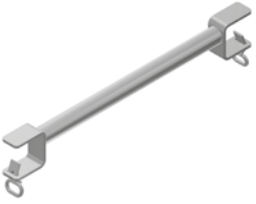


Steel, hot-dip galvanised. Decks with claws for
tubes or standard scaffold planks.
PU: 50 pieces

	1,39	9,10	005656	45,40
	1,50	9,90	000790	43,10

**DOUBLE LEDGER**

Steel, hot-dip galvanised. To support decks with
claws for tubes or standard scaffold planks.
PU: 50 pieces

	1,50	9,50	000759	54,50
	2,00	12,60	000760	64,40
	2,50	15,70	000792	75,30
	3,00	18,50	000793	87,30

		Length m	Weight approx. kg	Article No.	Price Euro
 <p>INTERMEDIATE LEDGER Steel, hot-dip galvanised. To support standard scaffold boards or for access decks for tubular supports. Are placed on longitudinal bars.</p>		0,74	3,70	005657	22,00
		0,75	3,90	005658	22,00
		1,00	4,80	005659	22,00
		1,10	5,00	005660	22,40
		1,39	6,20	005661	30,00
		1,50	6,60	000781	30,70
		2,00	8,30	000782	37,50
		2,50	10,10	000783	46,90
		3,00	11,90	000784	52,10
 <p>INTERMEDIATE DECK LEDGER, DECK TO DECK Steel, hot-dip galvanised. As intermediate support for shorter floors in the centre for example to provide an opening in the middle of the platform. Are placed on both sides on steel decks. PU: 50 pieces</p>	1-board	0,48	2,30	005662	23,50
	2-board	0,81	3,30	005663	26,00
	3-board	1,13	4,90	005664	30,20
 <p>INTERMEDIATE DECK LEDGER, DECK TO LEDGER Steel, hot-dip galvanised. As intermediate support for shorter decks on the edge. Are placed on one side on steel decks and on the other side on longitudinal ledgers. PU: 50 pieces</p>	1-board	0,50	2,70	005665	23,00
	2-board	0,83	3,80	005666	26,00
	3-board	1,15	4,90	005667	30,00
 <p>LEDGER, UNI-SUPPORT Steel, hot-dip galvanised. For use with serial UNI decks. The ledgers 1-3 board correspond to the centre distance of the UNI 70/100. PU: 50 pieces</p>	1-board (UNI 40)	0,41	2,10	005668	24,90
	2-board (UNI 70)	0,74	3,20	004517	26,40
	3-board (UNI 100)	1,10	5,70	004518	39,70
	4-board	1,39	7,20	005670	51,40

MJ COMBI metric

Horizontal ledgers



DOUBLE LEDGER, UNI-SUPPORT

Hot dipped galvanized steel.
with bracing joist for use of standard Uni decks at higher loads.
Please watch our Assembly instructions for the correct assembly/arrangement of the decks.
PU: 50 pieces



DECK RETAINER, UNI-SUPPORT

Steel, hot-dip galvanised. To protect decks against lift-off, with pin for toeboards.

Length m	Weight approx. kg	Article No.	Price Euro
1,50	9,40	004513	62,90
2,00	12,50	004514	82,90
2,50	15,50	004515	96,40
3,00	18,50	004516	112,50
<hr/>			
0,74	2,70	005677	21,90
1,10	3,30	005678	26,70
1,39	3,90	005679	26,70
1,50	4,10	005680	28,90
2,00	5,00	005681	37,60
2,50	5,90	005682	44,00
3,00	6,80	005683	48,60



MJ COMBI metric

Diagonal bracing


DIAGONAL BRACE

Steel, hot-dip galvanised. For further bracing of ledger and standards, for example, for special constructions, bay height 2.00 m.

PU: 50 pieces

bay size length m	Weight approx. kg	Article No.	Price Euro
0,50	8,00	004791	33,40
0,74/0,75	8,20	004935	33,40
1,00	8,40	004717	33,40
1,10*	8,50	004934	34,90
1,39	9,00	004933	35,60
1,50	9,20	000753	35,60
2,00	10,10	000755	37,70
2,50	11,20	000754	40,90
3,00	12,40	000756	41,40


DIAGONAL BRACE

Steel, hot-dip galvanised. Bay height 1.50 m.

PU: 50 pieces

0,50	6,50	005684	34,40
0,74/0,75	6,70	004939	34,40
1,00	7,00	004938	34,40
1,10*	7,10	004937	35,90
1,50	7,90	000808	39,20
2,00	9,10	000797	40,40
2,50	10,30	000807	41,60
3,00	11,60	000805	44,90


DIAGONAL BRACE

Steel, hot-dip galvanised. Bay height 1.00 m.

PU: 50 pieces

0,50	5,00	004946	33,40
0,74/0,75	5,30	004944	33,40
1,00	5,80	004943	33,90
1,10*	5,90	004942	33,90
1,25	6,30	004941	35,90
1,50	6,90	000803	39,20
2,00	8,20	000802	40,40
2,50	9,60	000801	41,60
3,00	11,00	000804	44,90


DIAGONAL BRACE

Steel, hot-dip galvanised. Bay height 0.50 m.

PU: 50 pieces

1,00	4,80	004949	32,90
1,50	6,20	004948	38,10
2,00	7,60	002184	39,20
2,50	8,20	005108	41,60
3,00	10,60	004947	43,90

* Corresponds to centre to centre distance of UNI 100.

MJ COMBI metric

Diagonal bracing



HORIZONTAL BRACE

Steel, hot-dip galvanised. Is used in surface scaffolds for bracing horizontal levels in non-square fields. Pin attachment on both sides.
PU: 50 pieces

bay size length m	bay size width m	Weight approx. kg	Article No.	Price Euro
2,00	0,74/0,75	5,60	005810	39,60
2,00	1,00	5,80	005685	40,60
2,00	1,50	6,50	005686	41,70
2,50	0,74/0,75	6,80	005687	39,80
2,50	1,00	7,00	005688	40,60
2,50	1,10	7,00	005689	44,30
2,50	1,39	7,30	005690	44,80
2,50	1,50	7,50	005691	44,80
2,50	2,00	8,20	004526	46,40
3,00	0,74/0,75	7,90	005692	44,80
3,00	1,00	8,10	005693	45,90
3,00	1,10	8,10	005694	46,40
3,00	1,39	8,40	005695	46,90
3,00	1,50	8,50	005696	47,90
3,00	2,00	9,10	005697	48,90
3,00	2,50	9,90	000679	49,90
0,75	0,75	4,00	005698	28,40
1,00	1,00	5,20	005699	34,40
1,50	1,50	7,40	005700	39,40
2,00	2,00	9,70	005701	48,90
2,50	2,50	11,90	004602	58,40
3,00	3,00	14,20	004601	68,40



DIAGONAL LEDGER

Steel, hot-dip galvanised. Used to brace bigger scaffolds, or birdcage scaffolds. Wedge heads on both sides.
PU: 50 pieces



Load class	Length m	Width m	Weight approx. kg	Article No.	Price Euro
6	0,75	0,32	7,20	005702	50,50
6	1,00	0,32	8,70	005703	51,60
6	1,10	0,32	9,10	004715	51,90
6	1,50	0,32	12,20	000796	57,10
6	2,00	0,32	15,30	000798	65,40
5	2,50	0,32	18,40	000799	73,20
4	3,00	0,32	21,40	000800	82,90
6	0,75	0,24	7,00	005704	49,80
6	1,00	0,24	8,20	005705	53,90
6	1,10	0,24	8,90	005706	55,00
6	1,50	0,24	12,10	005707	58,10
6	2,00	0,24	15,10	005708	66,50
5	2,50	0,24	18,40	002469	74,80
4	3,00	0,24	22,30	005709	85,20
<hr/>					
6	0,70	0,32	7,00	000040	48,00
6	1,10	0,32	9,50	000042	49,00
6	1,50	0,32	12,50	000039	55,00
6	2,00	0,32	15,50	000038	62,00
5	2,50	0,32	19,50	000037	68,50
4	3,00	0,32	23,00	000036	77,10
<hr/>					
6	0,70	0,32	6,17	007176	47,50
6	1,10	0,32	8,25	007177	48,50
6	1,50	0,32	10,80	007178	54,50
6	2,00	0,32	13,20	007179	61,10
5	2,50	0,32	15,90	007180	66,80
4	3,00	0,32	19,60	007181	76,00


STEEL DECK, TUBULAR SUPPORT

Hot-dip galvanised, perforated, anti-slip, easily stackable, with integrated deck retainer. Special width of 0.24 m closes gaps that cannot be laid with the 0.32 m wide standard decks.






STEEL DECK





Hot-dip galvanised, perforated, anti-slip, easily stackable. Length 2,50 m with handles. PU: 60/80 pieces

NEW

STEEL DECK "OPTI-LINE"

as above, but by optimizing the running profile and by using high quality steel. With handles. PU: 60/80 pieces

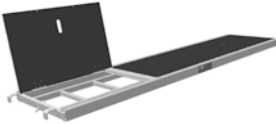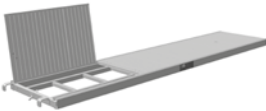	Load class	Length m	Width m	Weight approx. kg	Article No.	Price Euro
 TIMBER DECK Waterproofed, with galvanised deck caps. 48 mm thick, usable on both sides, 4 times multi-bloc glued. PU: 60 pieces (length 1,50 m - 3,00 m) 80 pieces (length 0,70 m - 1,10 m)	6	0,70	0,32	6,00	000176	29,90
	6	1,10	0,32	8,50	000175	34,70
	6	1,50	0,32	11,50	000035	39,30
	5	2,00	0,32	14,50	000034	46,00
	4	2,50	0,32	18,20	000032	52,90
	3	3,00	0,32	22,00	000030	58,70
 ALUMINIUM PLATFORM Double-sided use and non-slip surface. Box-profile with 5 supporting lateral bars. Extra robust design with high load rating. PU: 60 pieces	6	1,50	0,32	7,00	000317	81,00
	6	2,00	0,32	9,50	000316	92,00
	5	2,50	0,32	11,50	000315	96,00
	4	3,00	0,32	14,00	000313	112,00
	3	4,00	0,32	19,00	000310	199,00
 COMBI DECK WITH PLYWOOD PANEL Water resistant surface, non-slip and lightweight plywood panels BFU 100 G-12. PU: 14 pieces	3	2,00	0,63	17,50	000305	142,00
	3	2,50	0,63	21,00	000306	154,00
	3	3,00	0,63	23,50	000307	164,00
 COMBI DECK WITH ALUMINIUM PANEL, With non-slip aluminium decking, weather resistant, lightweight and robust. PU: 14 pieces	4	1,50	0,63	12,00	000433	135,00
	4	2,00	0,63	14,00	000432	158,00
	4	2,50	0,63	15,00	000431	187,00
	3	3,00	0,63	18,00	000430	212,00

	Load class	Length m	Width m	Weight approx. kg	Article No.	Price Euro
 <p>ALUMINIUM ACCESS DECK, TUBULAR SUPPORT Water-proof surface, anti-slip and light. With constructional plywood boards Type BFU100 G-12 (R protection). PU: 14 pieces</p>	3	2,50	0,63	26,00	005850	269,00
	3	3,00	0,63	29,00	005851	306,00
 <p>FULL ALUMINIUM ACCESS DECK, TUBULAR SUPPORT with anti-slip aluminium deck. Weather resistant, light and robust. PU: 14 pieces</p>	4	2,50	0,63	25,20	002468	309,00
	3	3,00	0,63	28,80	005727	327,00
 <p>ALUMINIUM ACCESS DECK UNI + ALUMINIUM LADDER with plywood panel and aluminium ladder. Water resistant top surface, non-slip and lightweight. Plywood panels BFU 100 G-12 (G-Guard). PU: 14 pieces</p>	3	2,50	0,63	25,00	000388	265,00
	3	3,00	0,63	28,00	000387	299,00
 <p>FULL ALUMINIUM ACCESS DECK + ALUMINIUM LADDER with non-slip aluminium panel and internal aluminium ladder. Weather resistant, lightweight and robust. Available for 2.00 m lengths with telescopic aluminium ladder. PU: 14 pieces</p>	4	2,00	0,63	19,00	000391	274,50
	3	2,50	0,63	22,50	000389	281,00
	3	3,00	0,63	25,00	000390	316,00



TOEBOARD TUBULAR SUPPORT
impregnated timber with galvanised fittings, completes the three-piece side guard.
PU: 80 pieces

Length m	Width m	Weight approx. kg	Article No.	Price Euro
0,74	–	1,90	006589	13,40
0,75	–	1,90	005728	13,40
1,00	–	2,30	005729	13,90
1,10	–	2,40	005730	13,90
1,50	–	3,20	000786	15,80
2,00	–	4,20	005731	16,70
2,50	–	5,10	000788	17,90
3,00	–	6,00	000789	19,00

TOEBOARD COUPLER
to be used only with UNI toeboard.

–	–	1,10	005732	10,40
---	---	------	--------	-------



TOEBOARD
Impregnated timber with galvanised fittings for hooking in the toeboard-pins of the frames and guard rail posts.
Completes the three-part side guard.
PU: 80 pieces

0,74	0,15	2,00	000186	13,20
1,10	0,15	2,50	000184	13,60
1,50	0,15	3,00	000071	13,80
2,00	0,15	4,50	000070	14,70
2,50	0,15	5,50	000069	16,40
3,00	0,15	6,50	000066	17,40
4,00	0,15	10,00	000183	42,00

Prices for printed toeboards on request.



END TOEBOARD
impregnated timber with galvanised fittings.
Completes guard protection at the ends.

0,74	0,15	1,50	005852	11,70
1,10	0,15	1,90	005853	12,30
1,50	0,15	2,50	005854	12,90
2,00	0,15	4,50	005855	14,10
2,50	0,15	5,50	005856	15,85
3,00	0,15	6,50	005857	16,85

Length m Weight approx. kg Article No. Price Euro




BRACKET TUBULAR SUPPORT
to extend scaffold inwards or outwards.

0,41	3,50	005741	33,90
0,50	3,80	005742	33,90
0,75	6,00	004822	41,90




BRACKET LEDGER, TUBULAR
for supporting the steel decks 0.24 m and 0.32 m. width, with tubular claws.

0,29	1,50	005743	14,00
0,36	1,70	005744	14,40



BRACKET UNI DECK
to extend scaffold inwards or outwards.
To be used with UNI system decks.

1-board (UNI 40)	0,41	3,30	004520	34,90
2-board (UNI 70)	0,74	5,90	004521	45,30



BASE PLATE
Steel, hot-dip galvanised, base plate 150 mm x 150 mm with tube support ca. 60 mm high, directs the load from the standards to the foundation.

– 2,00 000090 **9,90**



BASE JACK
Steel, with grip nut, galvanised, fast action thread, base plate 150 mm x 150 mm. Slip lock on grip nut. Can also be used as head plate.

PU: 375	0,30	2,40	000318	12,00
PU: 300	0,50	3,10	000319	14,50
PU: 300	0,60	3,40	000320	15,00
PU: 250	0,78	3,90	000321	19,00
PU: 200	1,00	4,70	000322	24,00



BASE JACK, SWIVELING
see base jack.
but also with swiveling base plate. 150 mm x 150 mm. Additional longitudinal scaffold bracing at base required.
PU: 250 pieces

0,50 3,10 000323 **35,00**



CASTOR WITH SPINDLE
1.000 kg maximum load, with nylon wheel, with mounted spindle height adjustable. For steel beam.

– 7,00 000332 **88,50**

PU: 100 pieces

	Length m	Width m	Weight approx. kg	Article No.	Price Euro
--	-------------	------------	----------------------	----------------	---------------




ALUMINIUM STAIRS WITH PLATFORM, TUBULAR SUPPORT for bay height 2.00 m. Single load according to DIN EN 12811-1. Comfortable outside access for extensive use of scaffold and when transporting bulky material. PU: 10 pieces	f. bay 2,50 m	3,25	0,64	28,50	005746	356,00
	f. bay 3,00 m	3,65	0,64	33,50	005747	418,00



SINGLE OUTSIDE GUARDRAIL to connect to COMBI disk, bay height 2.00 m.	2,50	–	10,70	005748	59,80
	3,00	–	13,00	005749	71,80



ALUMINIUM STAIRCASE WITH PLATFORM, UNI for bay height 2.00 m. Single load according to DIN EN 12811-1. Comfortable outside access for extensive use of scaffold and when transporting bulky material. PU: 10 pieces	f. bay 2,50 m	3,25	0,64	22,50	000417	369,00
	f. bay 3,00 m	3,63	0,64	27,50	000418	405,00



LEDGER FOR ALUMINIUM STAIRS, UNI	1,50	–	7,90	005750	60,90
---	------	---	------	--------	--------------












DISTANCE COUPLER Steel tube Ø 48.3 mm with two welded couplers, galvanised. To extend facade scaffold and stairway.	–	0,18	2,00	000233	16,75
---	---	------	------	--------	--------------



INSIDE STAIRCASE HANDRAIL Steel staircase for aluminium stairs. Hot-dip galvanised. PU: 20 pieces	A/F 22	2,25	–	11,50	006942	94,00
	A/F 19	2,25	–	11,50	000425	94,00










STEP ACCESS PLATFORM BRACKET to set up a stairway with a pre-assembled scaffold bay.	0,50	0,30	7,50	000234	74,00
--	------	------	------	--------	--------------

	Length m	Width m	Weight approx. kg	Article No.	Price Euro
	ACCESS LADDER, ALUMINIUM for inside scaffold climbing.				
	2,16	0,40	3,00	001323	49,90
	ACCESS LADDER, STEEL for inside scaffold climbing.				
	2,16	0,40	10,50	000172	45,90
	STEEL SCAFFOLD LADDER This extremely robust and stable ladder has become the first choice in industry for heavy-duty applications. The side rails are of 1½ " steel tubes, so that the double coupler connection is ensured. The ladders can be extended using normal joint pins.				
	2,00	0,45	21,00	000227	89,00
	3,00	0,45	28,50	000228	128,00
	4,00	0,45	34,50	000229	187,00
	ALUMINIUM SCAFFOLD LADDER with riveted tube joints, suited for all scaffold types, and may also be used for ladder platforms. TÜV inspected. Is used with double couplers. Distance between rungs 28 cm, width 47 cm. Price includes joint pins and plastic base.				
	2,00	0,47	5,80	000409	110,00
	3,00	0,47	8,00	000410	121,00
	4,00	0,47	10,00	000411	161,00
	5,00	0,47	12,60	000412	199,50
	LATTICE BEAM STEEL Hot-dip galvanised, 450 mm high, Ø 48.3 mm. Load depends on span in line with custom load table. PU: 25 pieces				
	3,20	0,45	30,00	000108	118,50
	4,20	0,45	39,00	000109	153,00
	5,20	0,45	50,00	000110	188,00
	6,20	0,45	59,00	000111	212,50
	LATTICE BEAM ALUMINIUM 450 mm high, Ø 48.3 mm, load depends on span in line with custom load table. PU: 25 pieces				
	3,20	0,45	12,00	000255	152,00
	4,20	0,45	15,00	000257	199,50
	5,20	0,45	20,00	000258	242,00
	6,20	0,45	23,00	000259	282,00
	HEAVY-DUTY LATTICE BEAM Steel tube, hot-dip galvanised, Ø 48.3 mm, parallel-web lattice beams, 750 mm high. As bridging beam suitable for special constructions with high loads or for larger spans.				
	3,00	0,75	50,00	000115	202,50
	4,00	0,75	60,00	000114	233,50
	5,00	0,75	75,00	000116	292,50
	6,00	0,75	85,00	000117	343,00
	LATTICE BEAM BASE PLATE Steel, hot-dip galvanised. Use in connection with a decking transom. For further expansion of scaffold pattern when bridging with lattice beams.				
	–	–	6,00	000235	39,50
	WALL CONNECTION FOR LATTICE BEAMS For doweling into walls for bridging constructions and the like. For lattice beams with 450 mm construction height.				
	–	–	3,50	000170	44,50





MJ COMBI metric

Accessories | Roof components

Tube connectors | Transoms


	Length m	Width m	Weight approx. kg	Article No.	Price Euro
 <p>STUD BOLT WITH CIRCLIP Bolt-free connection of lattice beams, replaces customary bolts 12 mm x 60 mm and reduces assembly time.</p>	–	–	1,00	002237	2,25
 <p>RIDGE CONNECTOR FRAME Steel, galvanised. For the connection of lattice beams on the roof ridge area.</p>	0,66	0,45	8,00	000113	67,50
 <p>REINFORCING FRAMES Steel. For the connection of two parallel mounted lattice beams. The riveted half-couplers enable quick and safe assembly. For lattice beams with 450 mm construction height. PU: 20 pieces</p>	2,50	0,45	15,00	000299	88,00
<p>TUBE CONNECTOR FOR LATTICE BEAMS Steel, hot-dip galvanised. For the continuous expansion of lattice beams. Suitable for lattice beams.</p>					
 <p>straight</p>	–	–	1,30	003588	17,95
 <p>bent, short</p>	–	–	2,00	000283	19,80
 <p>bent, long</p>	–	–	2,50	000123	21,80
<p>Nut M 12</p>	–	–	–	001798	0,35
<p>screw M 12 x 60</p>	–	–	–	002048	0,65
<p>TUBE CONNECTOR WITH HALF-COUPLER Steel, hot-dip galvanised, screw fitting for lattice beams, tube or bar.</p>	A/F 22	0,30	1,80	000223	19,25
	A/F 19	0,30	1,80	000222	19,25
 <p>DECK TRANSOM UNI FOR LATTICE BEAMS Steel, hot-dip galvanised. Placed on lattice beams or tubes and covered with system decks. Guarantees smooth deck surface for deck scaffolds. Please specify A/F width with your order!</p>	2-board	0,70	2,70	000216	29,00
	3-board	1,00	4,65	000207	42,00
	4-board	1,30	6,00	000210	54,50
	5-board	1,60	7,50	000211	67,00
	6-board	1,95	9,00	000212	83,00
	7-board	2,25	9,75	000213	85,00
	8-board	2,55	11,25	000214	109,50

MJ COMBI metric Aluminium keder rail system





	Length m	Width m	Weight approx. kg	Article No.	Price Euro
 <p>MJ ALUMINIUM KEDER RAIL Our keder rails are available in custom lengths on request.</p>	1,00	–	1,50	000285	17,00
	2,00	–	3,00	000287	34,00
	3,00	–	4,50	000288	51,00
	4,00	–	6,00	000289	68,00
	5,00	–	7,50	000290	85,00
	6,00	–	9,00	000291	102,00
 <p>MJ ALUMINIUM KEDER RAIL, CURVED Available in various curve-angles on request.</p>	1,00	–	1,50	000292	32,50
	2,00	–	3,00	002559	59,00
 <p>MJ KEDER RAIL COUPLER To fasten keder rails to tubes/frames or lattice beams.</p>	0,20	–	2,00	000293	15,90
 <p>MJ ALUMINIUM KEDER RAIL COUPLER Optimized design, Free accessible screwing enables fastening / releasing of the keder rail afterwards</p>	0,20	–	1,38	007325	15,90
 <p>RUBBER SEAL for beading rails in the roof area. The seal is used between beading rail ends to protection against dripping water. PU: 100 pieces</p>	–	–	0,005	000295	1,30
	 <p>PVC KEDER TARPS MESH REINFORCED FABRIC With laminated reinforcement seam on both sides to ensure safely anchored, dust and wind-free curtain barriers. Reinforcement seam can be welded to vertical edges if required.</p>	10,00	2,00	650g/m ²	–
<div style="border: 1px solid black; padding: 5px;"> <p>Technical data:</p> <p>Product: PVC tarp</p> <p>Material</p> <p>Fabric: PES as per DIN 60001</p> <p>Material coated: PVC</p> <p>Grams per square metre: ca. 650 g/m² as per DIN EN ISO 2286-2</p> <p>Tear strength: 3000 N/5 cm according to DIN EN ISO 1421</p> <p>Further tearing resistance</p> <p>K/S: 300N as per DIN EN 1875-3 + DIN 53363</p> <p>Cold resistance: -30°C as per DIN EN 1876-1</p> <p>Heat resistance: +70°C as per IVK/point 5</p> <p>Dimensioned tolerance: +/-1%</p> </div>	10,00	2,07	–	–	–
	10,00	2,50	–	–	–
	10,00	2,57	–	–	–
	10,00	3,00	–	–	–
	10,00	3,07	–	–	–






NEW

Construction site solutions always available. Higher strength reinforcement tarps available on request.

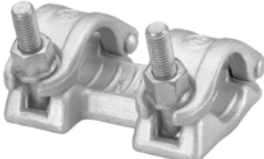

	Length m	Weight approx. kg	Article No.	Price Euro
STEEL SCAFFOLD TUBE 48.3 x 4.0 mm S235 JRH Hot-dip galvanised. Measurements as per DIN 4427/EN. Manufacturing length 6.00 m, shorter lengths upon request. Minimum yield strength 235 N/mm ² (2400 kg/cm ²) Connection of double couplers allowed. PU: 61 pieces	6,00	25,20	000334	70,00
STEEL SCAFFOLD TUBE 48.3 x 3.2 mm hot-dip galvanised. PU: 61 pieces	6,00	22,60	004087	51,00
ALUMINIUM SCAFFOLD TUBE 48.3 x 4.0 mm of AL MG SI 1, F31. Measurements in accordance with DIN 1725 / 1748. Manufacturing lengths of 6.00 m and 8.00 m. Minimum yield strength 200 N/mm ² . For connection with couplers for light scaffold constructions.	6,00	8,40	002028	72,00
	8,00	11,20	002031	96,00
TRIANGULAR BRACE Steel tube Ø 48.3 mm, hot-dip galvanised. Three scaffold tubes connected in triangular form. Brace with large load. (Distance between tubes 125 mm).	3,00	40,00	000150	149,00
	4,00	53,00	000151	199,00
	5,00	65,00	000152	251,00
	6,00	75,00	000153	302,50
TRIANGULAR PLATE Plate for triangular brace, steel, hot-dip galvanised, plate 300 mm x 8 mm, with three welded tube studs to carry the load.	–	6,00	000155	37,50

		Weight approx. kg	Article No.	Price Euro
 <p>DOUBLE COUPLER Heavy-duty model, ribbed. Drop-forged steel, hot-dip galvanised, according EN 74-1 RA BB. PU: 25 pieces</p>	A/F 22	1,15	000325	5,00
	A/F 19	1,10	000326	5,00
 <p>SWIVEL COUPLER Heavy-duty model, ribbed. Drop-forged steel, hot-dip galvanised, according to EN 74-1 SW B. PU: 25 pieces</p>	A/F 22	1,35	000328	5,50
	A/F 19	1,30	000329	5,50
<div style="background-color: #008000; color: white; padding: 5px; transform: rotate(-2deg); display: inline-block;"> Special couplers. see price list "universal accessories". </div>				
 <p>SLEEVE COUPLER Heavy-duty model, ribbed. Drop-forged steel, hot-dip galvanised, for tube extension in connection with a tube connector.</p>	A/F 22	1,80	000330	8,95
 <p>TUBE-CONNECTOR Drop-forged steel, hot-dip galvanised. for scaffold tubes 1 1/2" for the manufacture of end-to-end connections.</p>		1,00	000331	5,95

		Weight approx. kg	Article No.	Price Euro	
	TOEBOARD COUPLER Half coupler, drop-forged steel with welded-on toeboard pin.	A/F 22	1,00	000647	11,00
		A/F 19	1,00	002711	11,00
	HOOK COUPLER Drop-forged steel, hot-dip galvanised Half coupler with welded on stiffening hook. For larger wall distances the ideal solution for scaffold fastening. With collar nut 19 mm or 22 mm A/F range.	A/F 22	1,00	000224	10,40
		A/F 19	1,00	002551	10,40
	CLAW COUPLER Drop-forged steel, hot-dip galvanised, Half coupler with welded steel angle, to hang scaffold tubes or chains to steel constructions 9 nK (900 kg) all. weight, to be used in pairs, with collar nut. 19 mm or 22 mm A/F range.	A/F 22	1,00	000225	9,90
		A/F 19	1,00	000226	9,90
	BOLT -ON COUPLER Drop-forged steel, hot-dip galvanised, Half coupler with collar nut 22 mm width A/F as well as welded machine bolt M 14 x 50 mm.	A/F 22	0,80	000136	7,90
	COMBINATION COUPLER Drop-forged steel, hot-dip galvanised, half coupler with welded on machine bolt M 14 x 120 mm. to connect scaffold tubes to timber components. With collar nut 22 mm A/F range.	A/F 22	1,00	000392	11,75


SWIVEL PIN COUPLER

Drop-forged steel, hot-dip galvanised,
 Half coupler with collar nut 19 mm
 or 22 mm A/F range and
 welded toggle.

	Weight approx. kg	Article No.	Price Euro
A/F 22	0,80	000134	7,90
A/F 19	0,80	002354	7,90


DISTANCE COUPLER






Steel tube Ø 48.3 mm (width 0.18 m) with two welded
 couplers, galvanised. To extend
 facade scaffold and stairway.



2,00	000233	16,75
------	--------	--------------


LOCK AGAINST LIFT OFF WITH WEDGE






to prevent against the lift off of the decks.

0,70	006850	11,90
------	--------	--------------

		Weight approx. kg	Article No.	Price Euro	
	WALL COUPLER				
	T-carrier plate with two parallel welded half couplers to bear vertical loads of scaffold constructions. To be mounted directly to the building, extensive lattice beam constructions are no longer necessary. Basic structural analysis available.	A/F 22	3,60	003247	32,50
		A/F 19	3,60	004591	32,50
Special orders on request!					
	TIMBER COUPLER				
	Drop-forged steel, hot-dip galvanised. Half coupler with collar nut 22 mm A/F range and drilled angle iron to mount to timber.	A/F 22	1,80	000631	18,50
		A/F 19	1,80	002704	18,50
	HEXAGON COLLAR NUT				
	19 mm und 22 mm A/F range.	A/F 22	0,035	000165	0,36
		A/F 19	0,030	000166	0,36
	T-HEAD BOLT				
Gewinde M 14, Schaftlänge ca. 68 mm.	–	0,110	000164	0,36	
	SECURITY PIN				
	–	0,15	000508	0,70	

		Width m	Length m	Weight approx. kg	Article No.	Price Euro	
	WALL TIE WITH PLATE Steel tube Ø 48.3 mm, hot-dip galvanised. Installation with a standard coupler. To achieve a better horizontal alignment.	–	0,70	2,70	000124	14,25	
	WALL TIE Steel tube Ø 48.3 mm, hot-dip galvanised. Installation as short scaffold tie with one standard coupler, as long scaffold tie with two standard couplers.	–	0,30	1,40	000240	9,35	
		–	0,40	1,80	000242	9,75	
		–	0,50	2,00	000125	10,00	
		–	0,60	2,60	000241	12,00	
		–	1,00	3,80	000127	12,75	
		–	1,30	4,80	000131	15,50	
		–	1,50	5,50	000132	16,50	
	EYE-BOLT galvanised.	PU: 150	–	0,09	0,155	000358	1,00
		PU: 150	–	0,12	0,175	000359	1,10
		PU: 100	–	0,16	0,210	000360	1,20
		PU: 100	–	0,19	0,235	000363	1,25
		PU: 100	–	0,23	0,265	000361	1,30
		PU: 50	–	0,35	0,364	000362	1,70
	EXPANDING PLU G for eye-bolts with a timber thread Ø 12 mm for drillings Ø 14 mm. PU: 100 pieces	–	0,07	0,007	000357	0,25	
	PLASTIC CAP for closing anchor drill holes. PU: 100 pieces	–	–	0,003	000651	0,15	
	STACKING PALLET WITH REMOVABLE TUBES Specially suited for module scaffolds, standards, ledgers, guardrails, diagonal braces, tubes and toeboards. Open all round, suited for stacked and crane transports. The tubular supports are removable and secured in the base frame, so that empty pallets can be transported in a space-saving manner. Steel tube, hot-dip galvanised. PU: 5 pieces	1,25	0,85	35,90	005614	155,00	

Special orders on request!

	Article No.	Price Euro
 <p>MJ PREMIUM SET including:</p> <p>SAFETY HARNESS REVOLUTION R2 SCAF with front and back stopper loop, sharp-edge tested back loop extensions, quick adjustment, automatic closures, comfort back pads, belt-end clips, elastic Duraflex belt band, swivel connection. EN 361.</p>	Set price 005610 L-XL	199,90*
	Set price 006273 S-M	199,90*
 <p>FIXING MEANS WITH STRAP FALL ATTENUATOR Length 2.00 m, sharp-edge tested, horizontal approval (stopping point at base height), 66 mm scaffold hook, flexible design for added movement, safety clip to fasten safety harness, teflon-coated for longer service life. EN 354 and EN 355.</p>		
 <p>EQUIPMENT BAG 0,27 m x 0,50 m (D x L), made of PVC, red.</p>		
 <p>TOOL BAG fitting for ratchet key, can be directly clicked on to the safety harness or fixed to belt without ratchet.</p>	005611	12,00*
<p>EC-type examination certificate</p> <p>For the safety system there is an EC-type examination certificate issued by the inspection and certification body of the constructional trade association.</p>		
 <p>MILLER SAFETY HELMET (as shown in the picture, but without sticker)</p>	red 006271	50,00*
	white 006272	50,00*



Fax order form

MJ-Gerüst GmbH
 Ziegelstraße 68 | D-58840 Plettenberg
 Telephone: +49 (23 91) 81 05 - 350
 sales@mj-geruest.de | www.mj-geruest.de

Company:

City / Date

Order no.

Contact

Name of buyer

Customer no. (if applicable)

Order Inquiry

Product description	Article-No.	Quantity	Unit price / €	Total value / €

Order value / €

All prices are excl. of VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change. All prices are excl. of VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without notice. Sale is subject exclusively to our sales terms and delivery conditions. In brief: place of business and jurisdiction is Plettenberg. Extended reservation of property rights until full payment of all our outstanding accounts receivables. Our prices are ex works..

Shipping address:

_____	_____
Date of delivery	
_____	_____
Shipping method	
_____	_____
Terms of delivery	
_____	_____
Packaging costs	Terms of payment
_____	_____
Other	MJ consultant

Customer signature

Copy this form and fax to (0 23 91) 81 05-375

MJ-Gerüst GmbH

Ziegelstraße 68
D - 58840 Plettenberg

Telephone +49 (23 91) 81 05 -350
Fax +49 (23 91) 81 05 -375
email info@mj-geruest.de

www.mj-geruest.de

Berlin office

Poratzstraße
D - 16225 Eberswalde

Further companies of the Junior Company Group:

Junior Kühlkörper GmbH

Precision components
for the electronic and electrical industry
www.kuehlkoerper.de

MJ - Modul Rent GmbH

Sale and rental
of room containers for housing estates,
office buildings, industrial and commercial
www.mj-modulrent.de

